

## Walk-behind Trowels

**CT 36-5A      CT 36-6**  
**CT 48-8A      CT 48-9**

### Trowels feature high quality finishing plus triple protection

» Designed and built with the most advanced technology, WACKER walk-behind trowels offer high quality concrete finishing plus added operator safety. The patent-pending gearbox brake, gyroscopic safety sensor and engine speed limiter provide triple protection for the operator. This unique system minimizes a runaway handle situation.«

## WACKER

- ▣ Reliable
- ▣ Trustworthy
- ▣ Accessible
- ▣ Responsive



### Additional Advantages:

- + Dynamically balanced trowels (when blades are turning) offer nearly effortless operation.
- + Optimum weight distribution reduces the lateral force from the trowel for reduced operator fatigue.
- + Trowels feature a 30-degree blade pitch for better concrete burnishing.
- + For maximum flexibility, engine type, trowel diameter and handle can be selected to meet individual preferences or job site conditions (handle sold separately).
- + Guard ring features tubular framing for easy cleaning and maintenance.

Technical Data		CT 36-5A	CT 36-6	CT 48-8A	CT 48-9
Length x width x height	mm	2.005 x 915 x 1.040	2.005 x 915 x 1.040	2.160 x 1.220 x 1.040	2.160 x 1.220 x 1.040
Shipping size (l x w x h)	mm	1.040 x 1.020 x 740	1.040 x 1.015 x 740	1.260 x 1.170 x 1.095	1.260 x 1.170 x 1.095
Operating weight	kg	85	85	105	105
Shipping weight (including packaging)	kg	100	100	130	125
Trowel diameter	mm	915	915	1.220	1.220
Pitch range	°	0 - 30	0 - 30	0 - 30	0 - 30
Number of blades		4	4	4	4
Speed range	1/min	60 - 125	60 - 125	60 - 125	60 - 125
Drive engine	air-cooled single cylinder 4-cycle gasoline engine				
Manufacturer		Honda	WACKER	Honda	WACKER
Model		GX 160	WM 170	GX 240	WM 270
Displacement	cm³	165	170	245	265
Power output	kW (hp)	4,1 (5,5)	4,2 (6,0)	6,7 (8,0)	6,5 (9,0)
at rpm's	1/min	3.800	3.800	3.800	3.800
Fuel consumption	l/h	1,8	1,5	2,7	2,5
Tank capacity (fuel)	l	3,6	3,6	6,0	6,1

## Standard Package

Walk-behind Trowels

CT 36-5A  
CT 36-6  
CT 48-8A  
CT 48-9


includes operator's manual and parts book.

Guide handle must be ordered separately.  
Available at present: Handle with twist pitch control.

## Model Guide

CT = Walk-behind trowel  
36/48 = Trowel diameter in inches  
5/6/8/9 = Engine output  
A = Honda engine  
Standard models feature WACKER engine.

Accessories: Please contact us for suitable accessories.

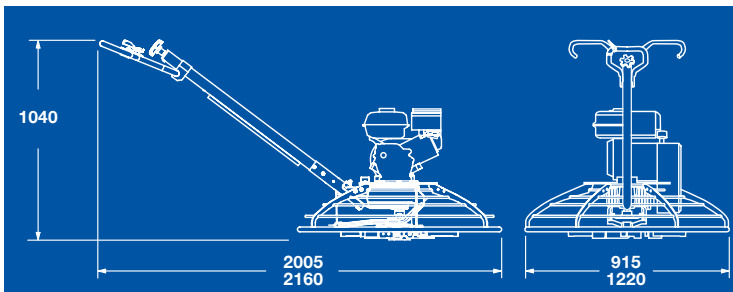

Specifications may change due to continuous product development.



Optional lifting bracket available for easy transport.